


D SERIES ACCESS CONTROL

D Series Small Zinc Alloy Luminous Exit Button w/ Back Box

Model: AE-DBML-30


Specs

Operating Voltage	9-13V DC
Material	Zink Alloy
Mechanical Life	1,000,000 Test
Sutable for Door	Hollow Door
Output Contact	COM & NO

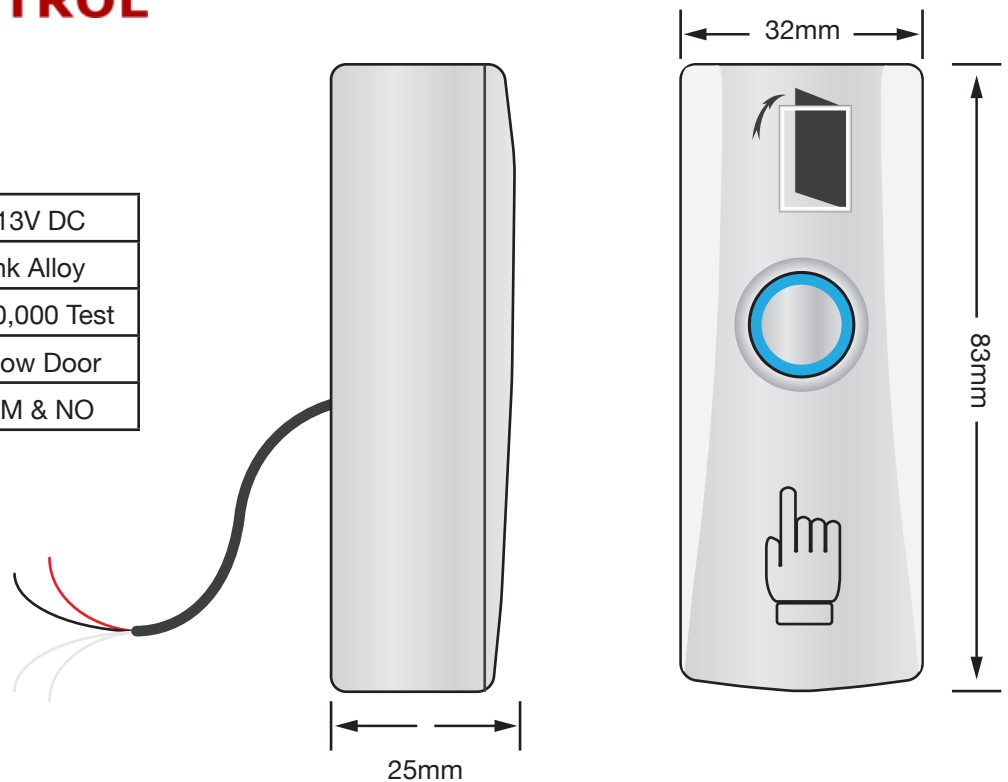

Cable Diagram

- **+12vDC:** This cable is the 12vDC input to provide power to the illumination.
- **GRD:** This cable provides Ground to the illumination.
- **COM:** This cable recive's signal from a device.
- **NO:** This cable sends the signal when the button is pressed.

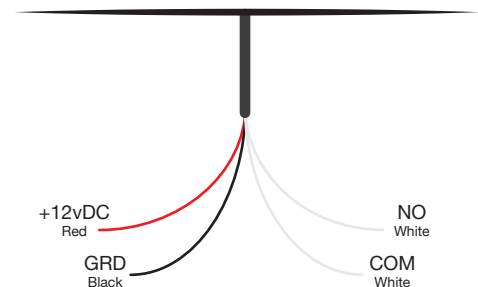

Connecting to D Series AC Board

To connect this Push to Exit Button to the D Series Access Control board please connect the following wires to the corresponding ports.

White Wire #1 = PX Port

Red Wire = +12vDC Port

White Wire #2 = GRD Port

Black Wire = GRD Port

The **Red** and **Black** wires can alternatively be connected to the Access Control power supply directly if preferred.

