


# D SERIES

## ACCESS CONTROL


## D Series Small Stainless Steel Infrared Luminous Exit Button

Model: AE-DLML-70

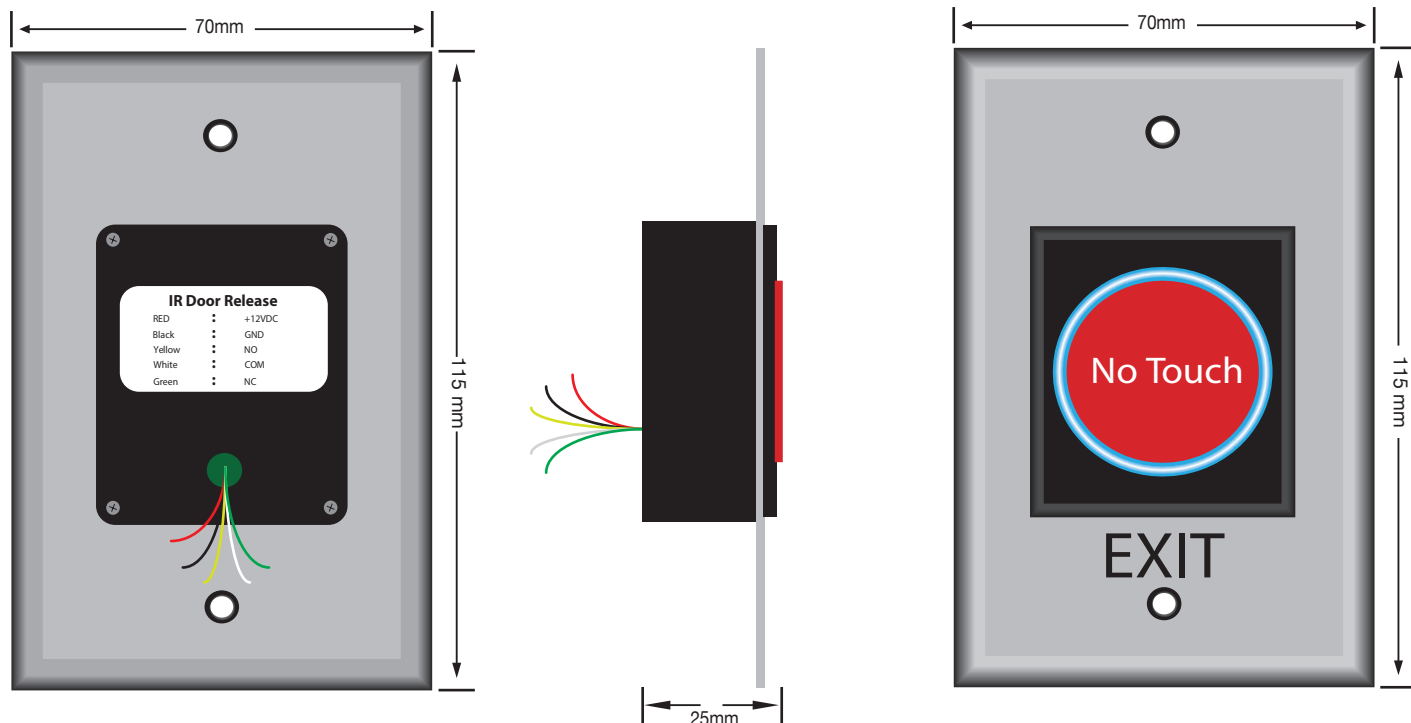

- **+12vDC:** This cable is the 12vDC input to provide power to the illumination.
- **GRD:** This cable provides Ground to the illumination.
- **COM:** This cable receive's signal from a device.
- **NO:** This cable sends the signal when the button is pressed.
- **NC:** This cable releases the signal when the button is pressed.

Cable Diagram

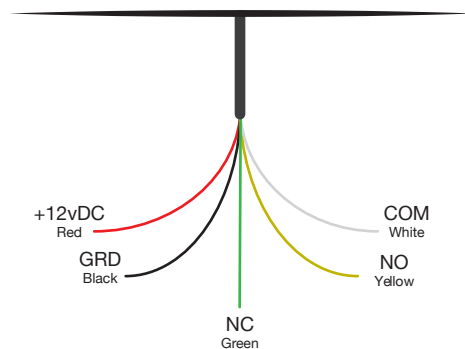

### Connecting to D Series AC Board

To connect this Push to Exit Button to the D Series Access Control board please connect the following wires to the corresponding ports.

**Red Wire** = +12vDC Port

**Black Wire** = GRD Port

**White Wire** = PX Port

**Yellow Wire** = GRD Port

The **Red** and **Black** wires can alternatively be connected to the Access Control power supply directly if preferred.

