


# IV-E8P40WZ-EP/AI

8 MP IR Vari-focal Dome WizMind Network Camera



Dimensions (mm[inch])

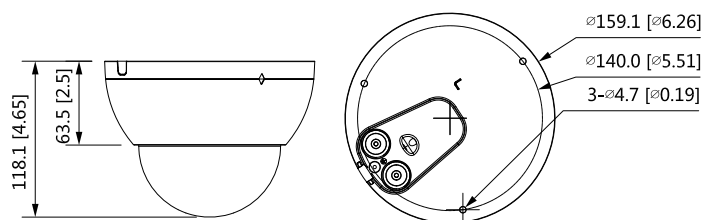

- 8-MP 1/1.8" CMOS image sensor, low illuminance, high image definition.
- Outputs max. 8 MP (3840 × 2160) @30 fps.
- Max. IR distance: 40 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card.
- 24V AC/PoE/12V DC power supply.
- ePoE, IP67, IK10 protection.
- SMD 3.0.

Technical Specification					
Camera					
Image Sensor	1/1.8" CMOS				
Max. Resolution	3840 (H) × 2160 (V)				
ROM	128 MB				
RAM	1 GB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s				
Min. Illumination	0.004 Lux@F1.4 (Color, 30IRE) 0.0004 Lux@F1.4 (B/W, 30IRE) 0 lux (Illuminator on)				
S/N Ratio	> 56 dB				
Illumination Distance	40 m (131.2 ft)				
Illuminator On/Off Control	Auto; Manual				
Illuminator Number	3 (IR)				
Pan/Tilt/Rotation Range	Pan: 0°–355° Tilt: 0°–80° Rotation: 0°–355°				

Lens					
Lens Type		Motorized vari-focal			
Lens Mount		ϕ14			
Focal Length		2.7 mm–12.0 mm			
Max. Aperture		F1.4			
Field of View		Horizontal: 110.4° (W)–45° (T) Vertical: 57.8° (W)–25.2° (T) Diagonal: 133.8° (W)–51.8° (T)			
Iris Control		Auto			
Close Focus Distance		1.0 m (3.3 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	86 m (282.2 ft)	34.4 m (112.9 ft)	17.2 m (56.4 ft)	8.6 m (28.2 ft)
	T	196 m (643.0 ft)	78.4 m (257.2 ft)	39.2 m (128.6 ft)	19.6 m (64.3 ft)

Smart Event					
IVS	Abandoned object; missing object				
Heat Map	Yes				

Professional, intelligent

IVS (Perimeter Protection)	Tripwire; intrusion; fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection; people gathering; parking detection
Face Detection	Face detection; track; snapshot optimization; snapshot; face enhancement; face exposure; face matting setting: face, single inch photo; three snapshot methods: real-time snapshot, optimized snapshot, quality priority snapshot; face angle filter; optimization time setting
People Counting	Support the counting of enter number, leave number and pass number, and displaying and outputting yearly/monthly/daily reports. Support the counting of number in area, and 4 rules configuration. Count number of people or stay time and link alarm. Support queue management, and 4 rules configuration. Count number of people or stay time and link alarm.

Intelligent Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos.
--------------------	--

Video	
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)
Smart Codec	Smart H.265+/H.264+
Video Frame Rate	Main stream: 3840× 2160 (1 fps–25/30 fps) Sub stream: D1 (1 fps–25/30 fps) Third stream: 1080p (1 fps–25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Stream Capability	3 streams
Resolution	3840 x 2160; 2592 x 1944; 2688 × 1520; 2560 × 1440; 2304 × 1296; 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32 kbps–8192 kbps H.265: 32 kbps–8192 kbps
Day/Night	Auto (ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	120 dB
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto; manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (Rol)	Yes (4 areas)
Image Stabilization	Electronic Image Stabilization (EIS)
Defog	Yes
Image Rotation	0°/90°/180°/270°(Support 90°/270° with 4M resolution and lower)
Mirror	Yes
Privacy Masking	4 areas

Audio	
Audio Compression	PCM; G.711a; G.711Mu; G.726; G.723

Alarm	
Alarm Event	No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; defocus detection; scene changing; intrusion; tripwire; abandoned object; missing object; fast moving; parking detection; loitering detection; people gathering; input abnormal detection; intensity change detection; people counting; face detection; people counting in area; stay alarm; people No. exception detection; queue management

Network	
Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes