


16/32 Channel 1.5U 4HDDs 4K & H.265 Lite Network Video Recorder




- 16/32-channel IP video access
- Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- Max 200 Mbps incoming bandwidth
- Up to 8MP resolution for preview and playback
- 8-channel decoding@1080p (30 fps)
- AI by Camera: Perimeter protection; SMD Plus; people counting; heat map

Dimensions (mm[inch])

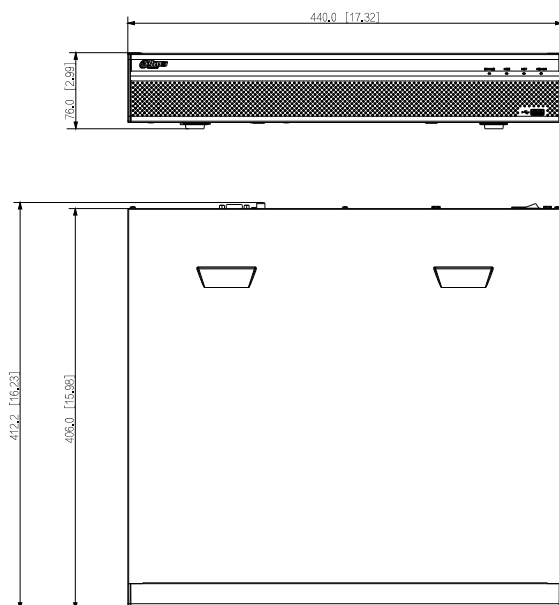

Panels

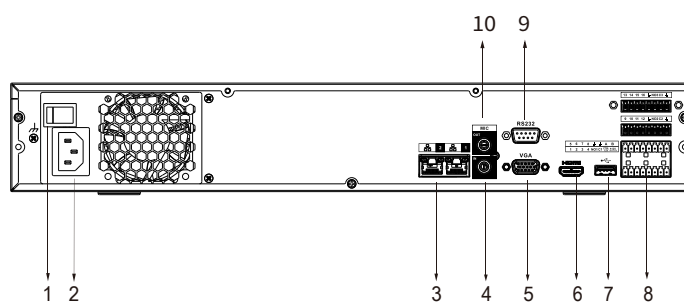

- | | |
|-----------------|-----------------------------|
| 1 Power Switch | 2 Power Input |
| 3 Network Ports | 4 AUDIO IN, RCA Connector |
| 5 VGA Port | 6 HDMI Port |
| 7 USB Port | 8 Alarm In/Out |
| 9 RS-232 Port | 10 AUDIO OUT, RCA Connector |

Technical Specification	
System	
Main Processor	Industrial embedded micro-processor
Operating System	Embedded Linux
Operation Interface	Web; local GUI
Perimeter Protection by Camera	
Performance	16 channels
AI Search	Search for pictures by channel, time and event type
SMD Plus by Camera	
Performance	16/32 channels
AI Search	Search by target classification (human, vehicle)
Video	
Access Channel	16/32
Network Bandwidth	200 Mbps for access, 200 Mbps for storage and 96 Mbps for forwarding
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080p, 1.3MP, 720p, D1, and more
Decoding Capability	8 channels@1080p (30 fps)
Video Output	HDMI: 3840 × 2160; 1920 × 1080; 1280 × 1024; 1280 × 720 VGA: 1920 × 1080; 1280 × 1024; 1280 × 720
Multi-screen Display	16-channel: 1/4/8/9/16 32-channel: 1/4/8/9/16/25/36
Third Party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, ONVIF, Canon and more
Compression	
Video	Smart H.265+; Smart H.264+; H.265; H.264
Audio	PCM; G.711A; G.711U; G.726
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (supports Dahua IP camera, DVR, NVS, and more); P2P
Mobile Phone Access	Android; iOS
Interoperability	ONVIF (profile T/S/G); CGI; SDK
Browser	Chrome; IE9 or later; Firefox
Record Playback	
Multi-channel Playback	1/4/9/16
Record Mode	Manual; schedule (general; MD; alarm; MD & alarm; intelligent)
Storage Method	Local HDD and network
Backup	USB device
Playback Function	1. Play; pause; stop; fast forward; fast backward; rewind; play by frame 2. Full screen; backup (cut/file) ; partially enlarge; audio on/off

Storage	
Disk Group	Yes
Alarm	
General Alarm	Motion detection; privacy masking; video loss; PIR alarm; IPC alarm
Anomaly Alarm	Camera offline; storage error; full storage; IP conflict; MAC conflict; login lock; network security anomaly
Intelligent Alarm	Perimeter protection; SMD; people counting; heat map
Alarm Linkage	Record; snapshot; IPC external alarm output; buzzer; log; preset; email
External Port	
Audio Input	1 channel, RCA connector
Audio Output	1 channel, RCA connector, which support voice intercom output
HDD	4 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
Alarm Input	16 channels
Alarm Output	4 channels
RS-232	1 channel, used to debug and pass through serial data
RS-485	1 channel, used to control PTZ, and it supports multiple protocols
USB	1 front USB 2.0 port, 1 rear USB 3.0 port
HDMI	1
VGA	1
Network	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet ports
General Parameter	
Power Supply	Single, 100V–240V AC, 50 Hz–60 Hz
Power Consumption	< 11.7W (without HDD)
Net Weight	4.5 kg (9.9 lb) (without HDD)
Gross Weight	7 kg (15.4 lb) (without HDD)
Product Dimensions	440.0 mm × 412.1 mm × 76.0 mm (17.3" × 16.2" × 3.0")
Package Dimensions	522 mm × 492 mm × 200 mm (20.6" × 19.4" × 7.9")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Storage Temperature	0°C to +40°C (+32°F to +104°F)
Operating Humidity	10%–93% (RH)
Storage Humidity	30%–85% (RH)
Operating Altitude	3,000 m (9,843 ft)
Certifications	CE: EN55032; EN55024; EN50130-4; EN60950-1 FCC: Part 15 Subpart B; ANSI C63.4-2014 UL: UL 60950-1