

32 Channels Penta-brid 4K-N/5MP 2U 8HDDs Digital Video Recorder




- H.265+/H.265 dual-stream video compression.
- Supports 32-channel AI-Coding.
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs.
- Max 32 channels IP camera inputs, each channel up to 12MP; Max 128 Mbps incoming bandwidth.
- Up to 12 channels video stream (analog channel) perimeter protection.
- Up to 32 channels video stream (analog channel) SMD plus.
- Up to 6 channels video stream (analog channel) human face recognition.
- IoT & POS functionalities.

eSATA	1
RS-232	1 port, for PC Communication & Keyboard
RS-485	1 port, for PTZ control
USB	4 (2 front USB 2.0 ports, 2 rear USB 3.0 ports)
HDMI	2
VGA	1
Network Port	2 (10/100/1000 Mbps Ethernet port, RJ-45)
Network Port	2 (10/100/1000 Mbps Ethernet port, RJ-45)


General

Power Supply	100-240 VAC, 50/60 Hz
Power Consumption	<30 W (without HDD)
Net Weight	7.00 kg (15.44 lb)
Gross Weight	9.60 kg (21.17 lb)
Product Dimensions	439.9 mm × 463.0 mm × 94.9 mm (17.32" × 18.23" × 3.73") (W × D × H)
Packaging Dimensions	570.0 mm × 570.0 mm × 226.0 mm (22.45" × 22.45" × 8.90") (W × D × H)
Operating Temperature	-10 °C to +55 °C (14 °F to +131 °F)
Operating Humidity	10%–90% (RH)
Installation	Rack or desktop
Certifications	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B

Dimensions (mm[inch])

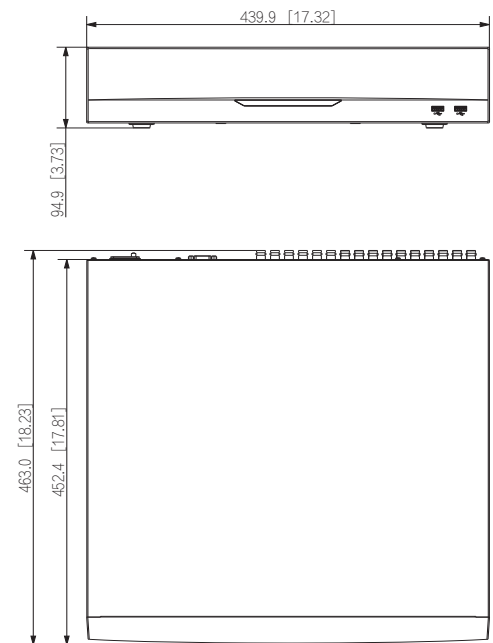

Panels

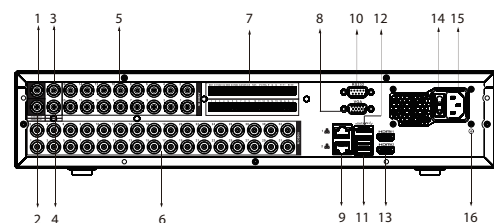

- | | |
|----------------------------|--------------------------|
| 1 AUDIO OUT, BNC Connector | 2 VIDEO OUT |
| 3 MIC IN, BNC Connector | 4 MIC OUT, BNC Connector |
| 5 AUDIO IN, BNC Connector | 6 VIDEO IN |
| 7 Alarm Input/Output | 8 VGA Port |
| 9 Network Ports | 10 RS-232 Port |
| 11 USB Ports | 12 eSATA Port |
| 13 HDMI Ports | 14 Power Switch |
| 15 Power Input | 16 Ground |

Technical Specification	
System	
Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI
Perimeter Protection	
Perimeter Performance AI by Recorder (Number of Channels)	Advanced Model: 6 channels, 10 IVS for each channel General Model: 12 channels, 10 IVS for each channel
Face Detection	
Face Attributes	Gender; age group; glasses; expressions; face mask; beard
Face Detection Performance of AI by Recorder (Number of Channels)	6 channels (up to 12 face images/s each channel)
Face Recognition	
Face Database Capacity	Up to 10 face databases with 20,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries & regions and state can be added to each face image
Face Recognition Performance of AI by Recorder (Number of Channels)	6 channels
SMD Plus	
SMD Plus by Recorder	32 channels: Secondary filtering for human and motor vehicle , reducing false alarms caused by leaves, rain and lighting condition change
Audio and Video	
Analog Camera Input	32 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	1. CVI: 4K@25/30 fps; 6 MP@20 fps; 5 MP@25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps. 2. TVI: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps.
IP Camera Input	Up to 32 channels of IPC access 32 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps
Encoding Capacity	Main stream: 4K@(1fps-7fps); 6 MP@(1fps-10fps); 5 MP@(1fps-12fps); 4K-N, 4 MP, 3 MP@(1fps-15fps); 4M-N, 1080p, 720p, 960H, D1,CIF@(1fps-25/30fps); Sub stream: 960H@(1fps-15fps); D1/CIF@(1 fps-25/30fps)
Dual-stream	Yes
Video Bit Rate	32 kbps-6144 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps

Video Output	2 HDMI, 1 VGA, 1 TV VGA/HDMI2: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI1: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 *Heterogeneous video sources output for HDMI2 is configurable.
Multi-screen Display	1/4/8/9/16/25/36
Third-party Camera Access	ONVIF; Panasonic; Sony; Axis; Arecont; Samsung
Compression Standard	
Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P
Mobile Phone Access	IOS; Android
Interoperability	ONVIF 21.12; CGI
Browser	Chrome, IE9 or later, Firefox
Network Mode	Multi-address mode,Fault Tolerance,Load Balance
Recording Playback	
Record Mode	General, motion detection; intelligent; alarm; POS
Recording Playback	1/4/9/16
Backup Method	USB device and network
Playback Mode	Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection)
Storage	
Disk Group	Yes
Alarm	
General Alarm	Motion detection; video loss; tampering; local alarm
Anomaly Alarm	No disk; storage error; disk full; camera offline; IP conflict; MAC conflict
Intelligent Alarm	Face detection; face recognition; perimeter protection
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; access controller; voice prompt; buzzer; log; preset; email
Ports	
TV Output	1 channel
Audio Input	16-channel BNC 32-channel BNC (Coaxial Audio)
Audio Output	1-channel BNC
Two-way Talk	1-channel BNC
Alarm Input	16 channels
Alarm Output	6 channels (5-channel relay output, 1-channel 12 V 1 A output)
HDD Interface	8 SATA ports, up to 16TB capacity for each disk. The maximum HDD capacity varies with environment temperature.